

REV.
A

AS3250

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


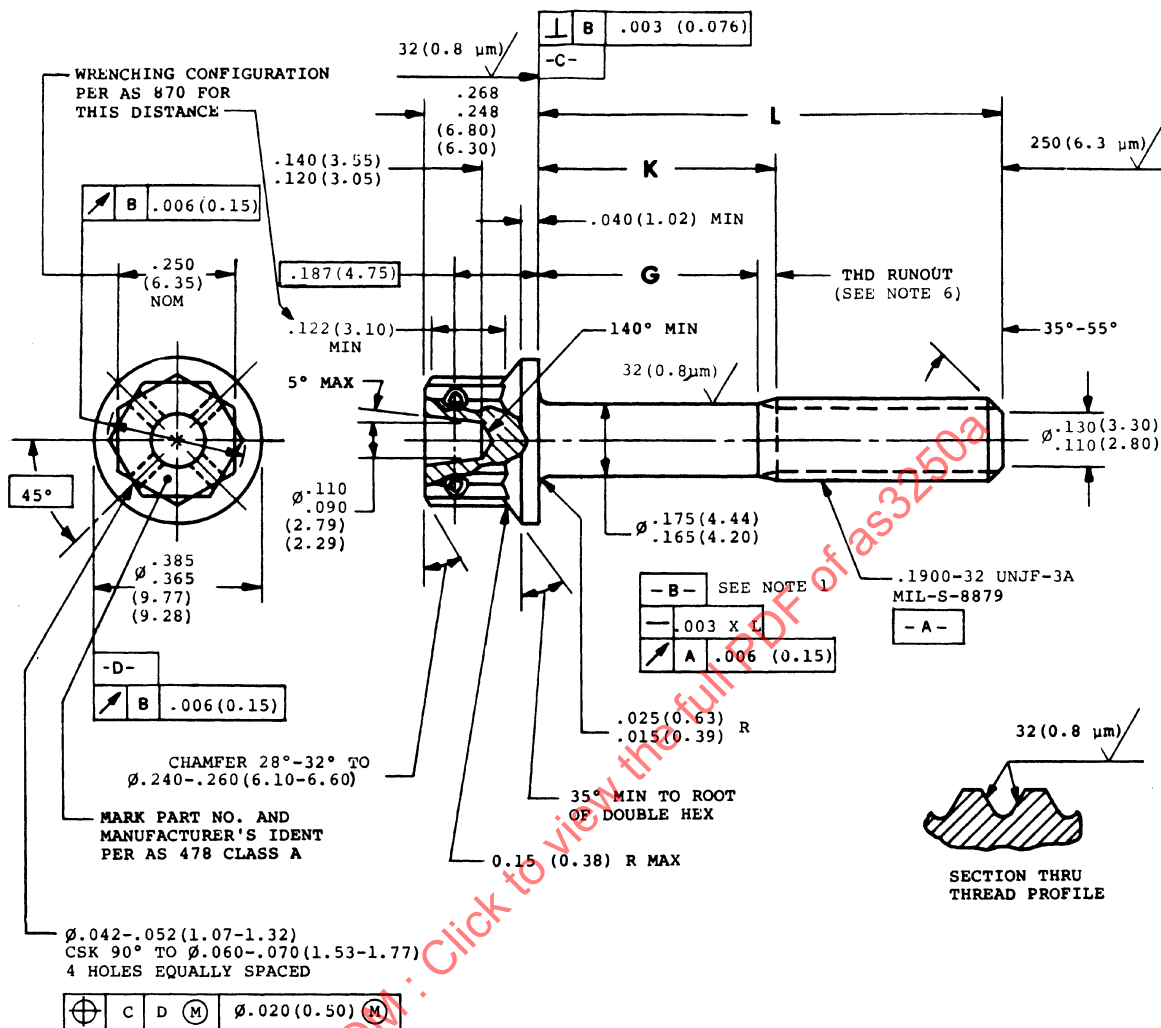


FIGURE 1

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BOLT, MACHINE-DOUBLE HEX EXTENDED
WASHER HEAD, DRILLED, PD SHANK, SILVER PLATED
.1900-32 UNJF-3A

AS3250
SHEET 1 OF 3

REV.
A

REV.
A

AS3250

TABLE 1

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	INCH	mm	INCH	mm	INCH	mm	LB/100	kg/100
AS3250-03	.302- .322	7.68- 8.17	.025	0.64	.092	2.33	.59	0.269
AS3250-04	.365- .385	9.28- 9.77	.025	0.64	.092	2.33	.63	0.287
AS3250-05	.428- .448	10.88-11.37	.025	0.64	.092	2.33	.68	0.306
AS3250-06	.490- .510	12.45-12.95	.025	0.64	.092	2.33	.72	0.325
AS3250-07	.552- .572	14.03-14.52	.025	0.64	.092	2.33	.76	0.344
AS3250-08	.615- .635	15.63-16.12	.025	0.64	.092	2.33	.80	0.363
AS3250-09	.678- .698	17.23-17.72	.025	0.64	.092	2.33	.84	0.381
AS3250-10	.740- .760	18.80-19.30	.025	0.64	.120	3.04	.88	0.400
AS3250-11	.802- .822	20.38-20.87	.060	1.53	.183	4.64	.92	0.419
AS3250-12	.865- .885	21.98-22.47	.123	3.13	.245	6.22	.97	0.438
AS3250-13	.928- .948	23.58-24.07	.186	4.73	.308	7.82	1.01	0.457
AS3250-14	.990-1.010	25.15-25.65	.248	6.30	.370	9.39	1.05	0.476
AS3250-15	1.052-1.072	26.73-27.22	.310	7.88	.432	10.97	1.09	0.494
AS3250-16	1.115-1.135	28.33-28.82	.373	9.48	.495	12.57	1.14	0.518
AS3250-17	1.178-1.198	29.93-30.42	.436	11.08	.558	14.17	1.18	0.537
AS3250-18	1.240-1.260	31.50-32.00	.498	12.65	.620	15.74	1.23	0.556
AS3250-19	1.302-1.322	33.08-33.57	.560	14.23	.682	17.32	1.27	0.574
AS3250-20	1.365-1.385	34.68-35.17	.623	15.83	.745	18.92	1.31	0.593
AS3250-21	1.428-1.448	36.28-36.77	.686	17.43	.808	20.52	1.35	0.612
AS3250-22	1.490-1.510	37.85-38.35	.748	19.00	.870	22.09	1.39	0.631
AS3250-23	1.552-1.572	39.43-39.92	.810	20.58	.932	23.67	1.43	0.650
AS3250-24	1.615-1.635	41.03-41.52	.873	22.18	.995	25.27	1.47	0.669
AS3250-25	1.678-1.698	42.63-43.12	.936	23.78	1.058	26.87	1.52	0.687
AS3250-26	1.740-1.760	44.20-44.70	.998	25.35	1.120	28.44	1.56	0.706
AS3250-27	1.802-1.822	45.78-46.27	1.060	26.93	1.182	30.02	1.60	0.725
AS3250-28	1.865-1.885	47.38-47.87	1.123	28.53	1.245	31.62	1.64	0.744
AS3250-29	1.928-1.948	48.98-49.47	1.186	30.13	1.308	33.22	1.68	0.763
AS3250-30	1.990-2.010	50.55-51.05	1.248	31.70	1.370	34.79	1.73	0.786
AS3250-31	2.115-2.135	53.73-54.22	1.373	34.88	1.495	37.97	1.82	0.824
AS3250-32	2.240-2.260	56.90-57.40	1.498	38.05	1.620	41.14	1.90	0.862
AS3250-33	2.365-2.385	60.08-60.57	1.623	41.23	1.745	44.32	1.98	0.899
AS3250-34	2.490-2.510	63.25-63.75	1.748	44.40	1.870	47.49	2.07	0.937
AS3250-35	2.615-2.635	66.43-66.92	1.873	47.58	1.995	50.67	2.15	0.975
AS3250-36	2.740-2.760	69.60-70.10	1.998	50.75	2.120	53.84	2.23	1.012
AS3250-37	2.865-2.885	72.78-73.27	2.123	53.93	2.245	57.02	2.33	1.055
AS3250-38	2.990-3.010	75.95-76.45	2.248	57.10	2.370	60.19	2.41	1.092
AS3250-39	3.115-3.135	79.13-79.62	2.373	60.28	2.495	63.37	2.49	1.130
AS3250-40	3.240-3.260	82.30-82.80	2.498	63.45	2.620	66.54	2.57	1.168
AS3250-41	3.365-3.385	85.48-85.97	2.623	66.63	2.745	69.72	2.66	1.205
AS3250-42	3.490-3.510	88.65-89.15	2.748	69.80	2.870	72.89	2.74	1.243
AS3250-43	3.615-3.635	91.83-92.32	2.873	72.98	2.995	76.07	2.82	1.281
AS3250-44	3.740-3.760	95.00-95.50	2.998	76.15	3.120	79.24	2.92	1.323
AS3250-45	3.865-3.885	98.18-98.67	3.123	79.33	3.245	82.42	3.00	1.361

AEROSPACE STANDARD

BOLT, MACHINE-DOUBLE HEX EXTENDED
WASHER HEAD, DRILLED, PD SHANK, SILVER PLATED
.1900-32 UNJF-3A

AS3250
SHEET 2 OF 3

REV.
A